



THE LINEUP

FIREARMS

















ACCESSORIES






CALIBERS AT-A-GLANCE

	M107A1	MODEL 82A1	MODEL 99	MRADELR	MRAD MK 22	MRAD	MRAD SMR	REC7 Di
Calibers								
50 BMG	•	•	•					
416 Barrett		•	•	•				
338 LM						•	•	
338 NM					•	•	•	
300 NM					•	•	•	
300 PRC								
7mm PRC						•		
300 WM						•	•	
308 Win						•	•	
7.62 x 51 NATO					•			
6.5 Creed								
5.56 x 45 NATO								

«

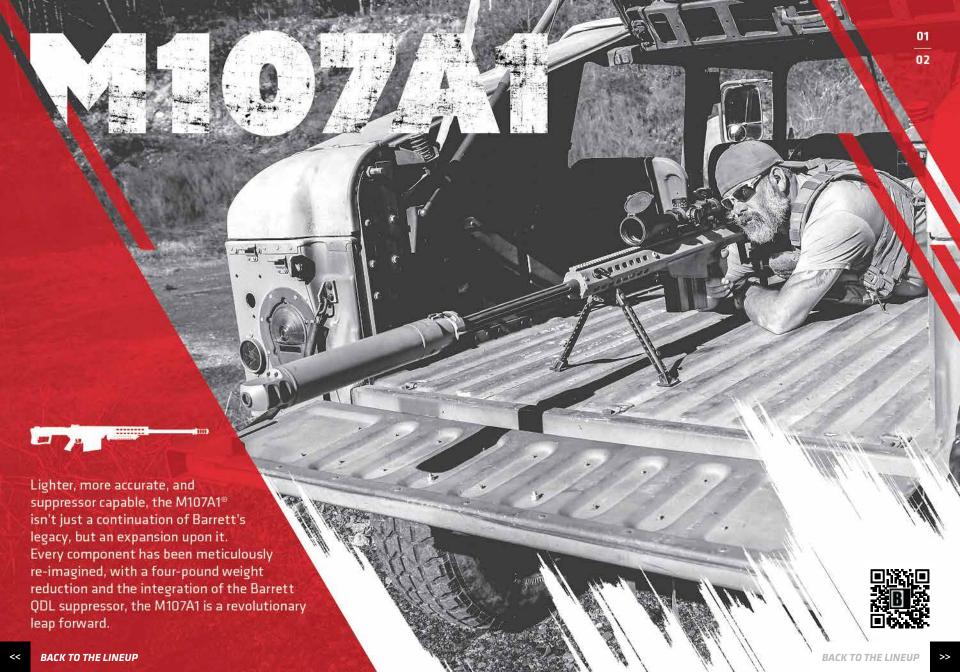

M107A1[®]




FEATURES

- 1 Recoil-operated, semi-automatic
- 2 | Suppressor-ready bolt carrier and buffer assemblies
- 3 | Accepts Barrett QDL suppressor
- 4 | 4 lbs. (1.8 kg) overall weight reduction compared to original M107
- 5 | Electroless nickel plating on bolt assembly for reduced wear, maintenance, and added corrosion resistance
- 6 | Lightweight aluminum upper receiver with integral 23" (584 mm) 27 MOA M1913 optics rail
- 7 | 20" (508 mm) or 29" (737 mm) barrel with chrome-lined chamber and bore
- 8 | Flip-up iron sights

- 9 | Mil-Spec hard anodized base with Cerakote® Black, Tungsten Grey, or Flat Dark Earth finish for enhanced corrosion resistance
- 10 | Modular rear hand grip mounted on M1913 rail accepts lightweight adjustable monopod
- 11 | 10-round steel magazine with cartridge witness indicators
- 12 | Lightweight adjustable bipod
- 13 | Thermal cheek piece
- 14 | Recoil pad
- 15 | Accepts side accessory rails
- 16 | Front and rear sling loops
- 17 | Accepts Barrett tripod adapter mount

SPECIFICATIONS

	Black	Tungster	Grey	Flat Dark Earth
Caliber	50 BMG		50 BMG	
Operation	Recoil-Operated, Ser	mi-Automatic	Recoil-O	perated, Semi-Automatic
Barrel Length	20" (508 mm)		29" (737	mm)
Rail	23" (584 mm) / 27 N	40A	23" (584	mm) / 27 MOA
Overall Length	48" (1219 mm)		57" (144	8 mm)
Twist Rate	1 : 15" (381 mm)		1 : 15" (38	31 mm)
Weight	27.4 lbs (12.4 kg)		28.7 lbs ((13.0 kg)
Mag. Capacity	10		10	

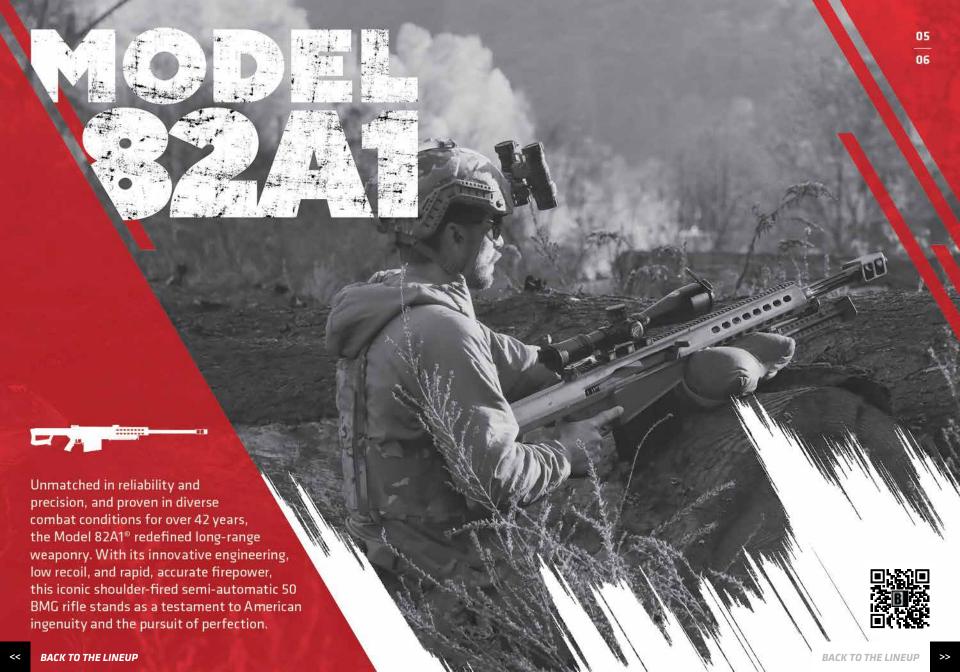

MODEL 82A1[®]




FEATURES

- 1 Recoil-operated, semi-automatic
- 2 | High-efficiency arrowhead 2-port brake for 50 BMG and cylindrical 3-port brake for 416 Barrett
- 3 | Steel receivers come with a Mil-Spec black manganese phosphate finish or Cerakote® Flat Dark Earth finish for enhanced corrosion resistance
- 4 23" (584 mm) 27 MOA M1913 optics rail with carrying handle
- 5 | 20" (508 mm) or 29" (737 mm) barrel with chrome-lined chamber and bore
- 6 | 10-round steel magazine
- 7 | Flip-up iron sights
- 8 Rear hand grip accepts adjustable monopod

- 9 | Adjustable bipod
- 10 | Recoil pad
- 11 | Accepts side accessory rails
- 12 | Front and rear sling loops
- 13 | Accepts Barrett tripod adapter mount

SPECIFICATIONS

VAILABLE COL	Black	Flat Dark Earth	_
Caliber	50 BMG	50 BMG	416 Barrett
Operation	Recoil-Operated, Semi-Automatic	Recoil-Operated, Semi-Automatic	Recoil-Operated, Semi-Automatic
Barrel Length	20" (508 mm)	29" (737 mm)	29" (737 mm)
Rail	23" (584 mm) 27 MOA	23" (584 mm) 27 MOA	23" (584 mm) 27 MOA
Overall Length	48" (1219 mm)	57" (1448 mm)	57" (1448 mm)
Twist Rate	1 : 15" (381 mm)	1 : 15" (381 mm)	1:12" (305 mm)
Weight	30.1 lbs (13.7 kg)	31.4 lbs (14.2 kg)	31.9 lbs (14.5 kg)
Mag. Capacity	10	10	10

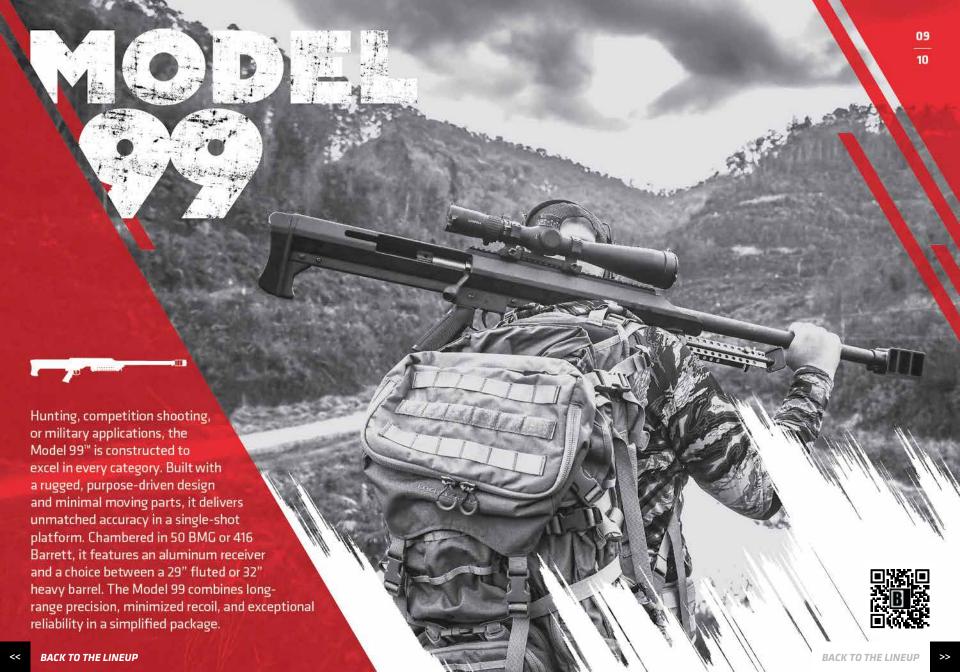

MODEL 99[™]



FEATURES

- 1 One piece aluminum extrusion receiver
- 2 | Easy feed, single-shot
- 3 | Interrupted, buttress-threaded bolt for superior lock up
- 4 Black Mil-Spec hardcoat anodized base with Cerakote® Black or Flat Dark Earth final finish
- 5 | 13.75" (349 mm) 27 MOA attached M1913 optics rail
- 6 | Match grade 29" (736 mm) fluted or 32" (813 mm) heavy barrel with Chrome-lined chamber (416 Barrett only)
- 7 Available in 50 BMG or 416 Barrett
- 8 | 3-port high-efficiency muzzle brake

- 9 | QDL suppressor capable when used with QDL Muzzle Brake (sold separately)
- 10 | Rear hand grip accepts adjustable monopod (sold separately)
- 11 | Recoil pad
- 12 | Adjustable bipod

SPECIFICATIONS

VAILABLE COL	ORS: Black	Flat Dark Earth	
Caliber	50 BMG	50 BMG	416 Barrett
Operation	Single-Shot, Bolt-Action	Single-Shot, Bolt-Action	Single-Shot, Bolt-Action
Barrel Length	29" Fluted (737 mm)	32" Heavy (813 mm)	32" Heavy (813 mm)
Rail	13.75" (349 mm) 27 MOA	13.75" (349 mm) 27 MOA	13.75" (349 mm) 27 MOA
Overall Length	47" (1194 mm)	50" (1270 mm)	50" (1270 mm)
Twist Rate	1 : 15" (381 mm)	1 : 15" (381 mm)	1 : 12" (305 mm)
Weight	23 lbs (10.4 kg)	25 lbs (11.3 kg)	25 lbs (11.3 kg)
Shot Capacity	1	1	1



MRADELR[™]




FEATURES

- User-changeable barrels and calibers with tool-less quick-change firing pin and bolt head
- 2 | Electroless nickel plating on bolt head for reduced wear, maintenance, and added corrosion resistance
- 3 | Push button adjustable length of pull
- 4 Oversized recoil pad with push button height adjustment
- 5 | Fixed stock with modular rear bag rider mounted on M1913 rail
- 6 | Height adjustable, locking polymer cheek piece
- 7 | M-LOK® compatible modular upper receiver
- 8 | Continuous integral 10 MIL top rail, 24.6" (626 mm) length
- 9 | High-efficiency 3-port muzzle brake
- 10 | QDL suppressor capable when used with QDL Muzzle Brake (sold separately)

- 11 | Adjustable single stage trigger module can be removed without tools
- 12 | Oversized trigger guard allows access with gloves
- 13 | Standard MRAD ambidex trous 45° safety
- 14 | 5 round, single stack, polymer magazine
- 15 | Ambidextrous magazine release and relief cut magazine well for quick reloads
- 16 | Accepts standard M4/M16 pistol grips
- 17 | Accepts most standard aftermarket bolt knobs
- 18 | One piece polymer bolt guide acts as dust cover and provides smooth bolt cycling
- 19 | 60° bolt throw
- 20 | Nitride bolt body
- 21 | Type 3, class 2 hard coat anodized base with Cerakote® Black, Tungsten Grey or Flat Dark Earth final finish
- 22 | Match-grade, single point cut, hand lapped stainless steel barrel

SPECIFICATIONS

VAILABLE COLORS: 1	Black Tungsten Gro	ey Flat Dark Earth
Caliber	416 Barrett	416 Barrett
Operation	Bolt-Action Repeater	Bolt-Action Repeater
Barrel Length	30" (762 mm)	36" (914 mm)
Rail	24.63" (626 mm) / 10 MIL	24.63" (626 mm) / 10 MIL
Overall Length	56.5" (1435 mm)	62.5" (1588 mm)
Twist Rate	1:12" (305 mm)	1 : 12" (305 mm)
Weight	25.3 lbs (11.5 kg)	25.4 lbs (11.5 kg)
Mag. Capacity	5	5

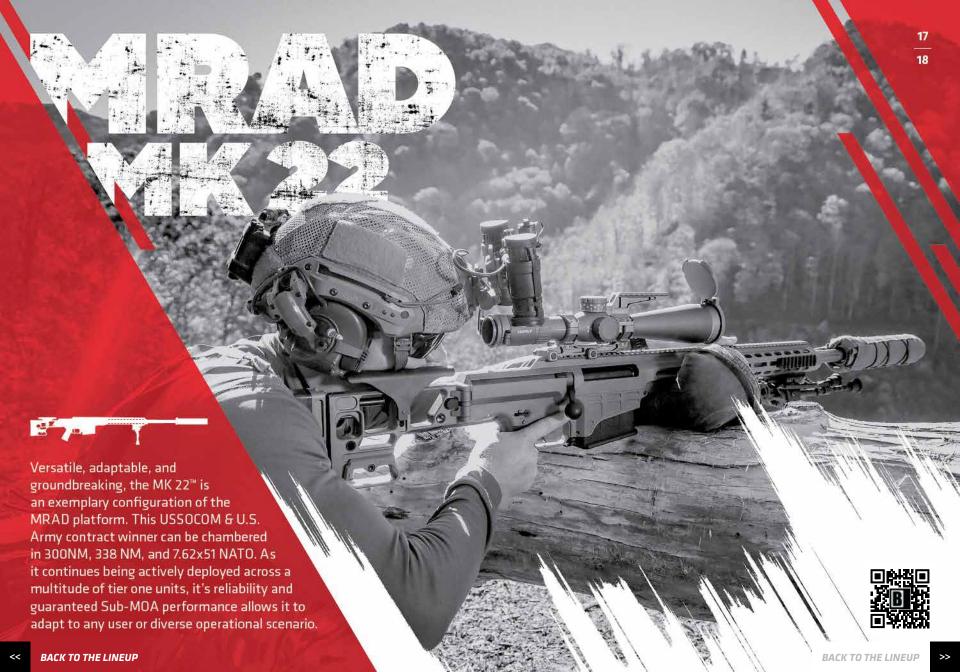

MRAD® MK 22[™]

SCOPE COMBO KIT COMES WITH: (2) 10-round magazines, bipod, bag rider, (2) sling swivels, (3) accessory rails, ASR or PSR scope & mount, factory zeroing target, and Pelican" hard carrying case. (See Next Page for Deployment Kit Option)



FEATURES

- Push button adjustable length of pull and recoil pad height
- 2 | Polymer cheek piece is height adjustable and reversible
- 3 | Lightweight folding stock provides compact mobility
- 4 Polymer bolt guide acts as dust cover and provides smooth bolt cycling
- 5 | 10 MIL rail
- 6 | Mil-Spec hard anodized base with Cerakote® Covote final finish
- 7 | M-LOK® compatible upper receiver
- 8 | Match-grade, fluted stainless steel barrels
- 9 | High-efficiency, suppressor-capable muzzle brake
- 10 | 3 user-changeable calibers
- 11 | Beveled magazine well for quick reloads

- 12 | 10-round, drop free, polymer magazine
- 13 | Ambidextrous magazine release is accessible while maintaining firing grip
- 14 | Oversized trigger guard allows access with gloves
- 15 | Factory set 2.5 lb. single-stage trigger with anti-tamper epoxy on the adjustment screws
- 16 | Accepts most standard M4/M16 pistol grips
- 17 | Thumb-operated 45° safety configurable for right / left-handed operation
- 18 | Bag rider rail cover
- 19 | 9-slot M-LOK® rails
- 20 | AML338 suppressor sold separately

SPECIFICATIONS

AVAILABLE COLOR:

Coyote

Caliber	338 NM	300 NM	7.62 x 51 NATO
Operation	Bolt-Action Repeater	Bolt-Action Repeater	Bolt-Action Repeate
Barrel Length	27" (686 mm)	26" (660 mm)	20" (508 mm)
Rail	22" (559 mm) 10 MIL	22" (559 mm) 10 MIL	22" (559 mm) 10 MIL
Overall Length	49.4" (1255 mm)	48.4" (1229 mm)	42.4" (1077 mm)
Twist Rate	1: 9.4" (240 mm)	1 : 8" (200 mm)	1 : 8" (200 mm)
Weight	15.2 lbs (7.0 kg)	15.2 lbs (7.0 kg)	13.9 lbs (6.3 kg)
Mag. Capacity	10	10	10

MRAD® MK22[™]

ACCESSORIES




MK 22 Pelican™ Case & Soft Case





* Optic and suppressor shown in this publication are sold separately.

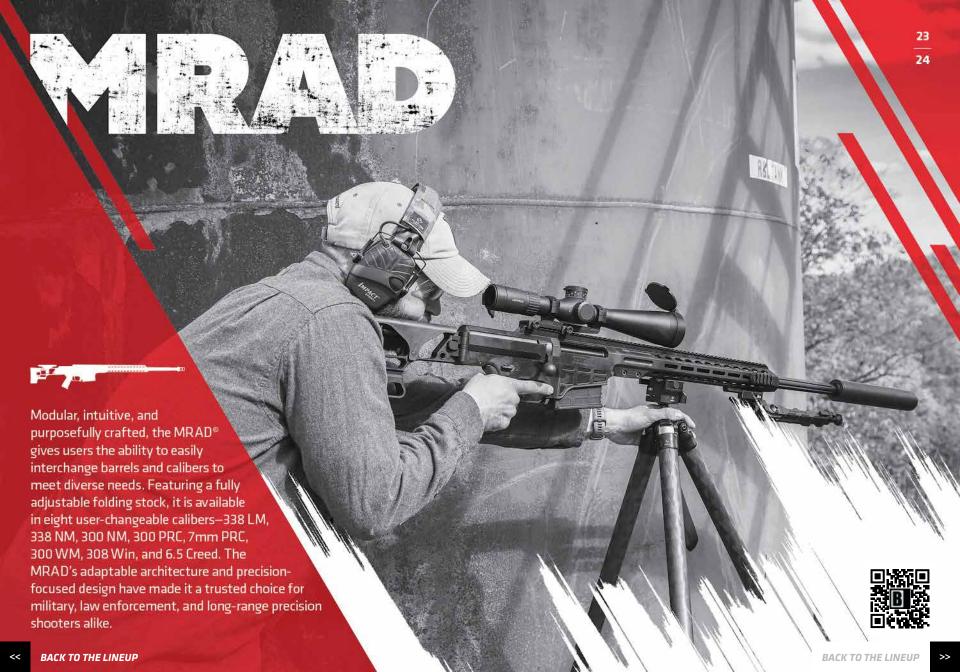



FEATURES

- 1 | Push button adjustable length of pull and recoil pad height
- 2 | Polymer cheek piece is height adjustable and reversible
- 3 | Lightweight folding stock provides compact mobility
- 4 | Polymer bolt guide acts as dust cover and provides smooth bolt cycling
- 5 | 10 MIL rail
- 6 | Mil-Spec hard anodized base with Cerakote® Black, Tungsten Grey, or Flat Dark Earth final finish
- 7 | M-LOK® compatible upper receiver
- 8 | Match-grade, fluted stainless steel barrels
- 9 | High-efficiency, suppressor-capable muzzle brake
- 10 | 8 user-changeable calibers
- 11 | Relief cut magazine well for quick reloads
- 12 | 10-round, drop free, polymer magazine

- 13 | Ambidextrous magazine release is accessible while maintaining firing grip
- 14 | Oversized trigger guard allows access with gloves
- 15 | Adjustable 2-stage trigger module can be removed without tools
- 16 | Accepts most standard M4/M16 pistol grips
- 17 | Thumb-operated 45° safety configurable for right / left-handed operation
- 18 | Recoil pad with push button height adjustment
- 19 | 5 Shot, Sub-MOA performance
- 20 | Accepts 5-slot M-LOK® rails and 9-slot M-LOK® rails

SPECIFICATIONS

					,			
Caliber	338 LM	338 NM	300 NM	300 PRC	7mm PRC	300 WM	308 W in	6.5 Creed
Operation	Bolt-Action Repeater	Bolt-Actio Repeater						
Barrel Length	26" (660 mm)	17" / 24" (432 mm / 610 mm)	24" (610 mm)					
Rail	22" (559 mm) 10 MIL	22" (559 mm) 10 MIL						
Overall Length	49.4" (1255 mm)	40.4" / 47.4" (1026 mm / 1204 mm)	47.4" (1204 mn					
Twist Rate	1 : 9.4" (240 mm)	1 : 9.4" (240 mm)	1 : 8" (200 mm)	1:8" (200 mm)	1 : 8" (200 mm)	1 : 8" (200 mm)	1 : 8" (200 mm)	1: 8" (200 mm
Weight	14.5 lbs (6.6 kg)	11.9 / 13.3 lbs (5.4 / 6.0 kg)	13.3 lbs (6.0 kg)					
Mag. Capacity	10	10	10	10	10	10	10	10



MRAD®SMR



- 1 Polymer cheek piece is height adjustable and reversible
- 2 | Fixed stock (additional length of pull available with spacer kit)
- 3 | Polymer bolt guide acts as dust cover and provides smooth bolt cycling
- 10 MIL rail
- 5 | Mil-Spec hard anodized base with Cerakote® Black, Tungsten Grey, or Flat Dark Earth final finish
- 6 M-LOK® compatible upper receiver
- 7 | High-efficiency, suppressor-capable muzzle brake
- 8 7 non-interchangeable calibers
- 9 | Match-grade, fluted stainless steel barrels
- 10 | Beveled magazine well for quick reloads
- 11 | 10-round, drop-free, polymer magazine
- 12 | Ambidextrous magazine release is accessible while maintaining firing grip

- 13 Oversized trigger guard allows access with gloves
- 14 | Adjustable 2-stage trigger module can be removed without tools
- 15 | Accepts most standard M4/M16 pistol grips
- 16 | Thumb-operated 45° safety configurable for right / left-handed operation
- 17 | Non-adjustable recoil pad
- 18 | 5-Shot, Sub-MOA Performance
- 18 | 7-slot M-LOK® rail

SPECIFICATIONS

WAILAD	LECOLOR	Black		Tungsten	Grey	Flat Dark E	arth
Caliber	338 LM	338 NM	300 NM	300 PRC	300 W M	308 Win	6.5 Creed
Operation	Bolt-Action Repeater	Bolt-Action Repeater	Bolt-Action Repeater	Bolt-Action Repeater	Bolt-Action Repeater	Bolt-Action Repeater	Bolt-Action Repeater
Barrel Length	26" (660 mm)	17" / 24" (432 mm / 610 mm)	24" (610 mm)				
Rail	22" (559 mm) 10 MIL	22" (559 mm) 10 MIL					
Overall Length	48.5" (1232 mm)	39.5"/ 46.5" (1003 mm / 1181 mm)	46.5" (1181mm)				
Twist Rate	1 : 9.4" (240 mm)	1:9.4" (240 mm)	1 : 8" (200 mm)	1: 8" (200 mm)	1: 8" (200 mm)	1:8" (200 mm)	1 : 8" (200 mm)
Weight	12.3 lbs (5.6 kg)	10.6/12.0lbs (4.8/5.4 kg)	12.0 lbs (5.4 kg)				
Mag. Capacity	10	10	10	10	10	10	10



REC7[®] DI



FEATURES

- 1 Direct impingement, semi-automatic
- 2 | Magnesium phosphate bolt carrier group
- 3 | Cold hammer forged chrome-line barrel
- 4 | Forged aluminum receivers with black anodized finish
- 5 | Barrett M-LOK® handguard
- 6 | 3-prong flash hider
- 7 | Beveled magazine well for rapid changes
- 8 | ALG QMS trigger
- 9 | Enhanced trigger guard allows access with gloves
- 10 | Ambidextrous safety (45° or 90° throw)
- 11 | Mil-Spec charging handle
- 12 | Magpul MBUS® sights

- 13 | Magpul stock with adjustable length of pull
- 14 | Magpul MOE pistol grip
- 15 | 30-Round Magpul PMAG
- 16 | 5 Shot Sub-MOA precision barrel
- 17 | Geissele gas block

SPECIFICATIONS

AVAILABLE COLOR:

Black

Caliber	5.56 x 45 NATO
Operation	Direct Impingement, Semi-Automatic
Barrel Length	16" (406 mm)
Overall Length	33" (838 mm)
Twist Rate	1 : 7" (178 mm)
Weight	6.6 lbs (3.0 kg)
Mag. Capacity	30



AM & AML

Crafted for precision bolt-action rifles, the Adapter Mount (AM) and Adapter Mount Locking (AML) monocore suppressors minimize point impact shift without compromising accuracy. The AM338 and AML338 models offer versatile compatibility across various calibers, facilitated by Barrett® AM338 Muzzle Brake Adapters available in 5/8 x 24 and 3/4 x 24 configurations. This adaptability underscores Barrett's commitment to precision and versatility in firearm accessories.







SPECIFICATIONS

VAILABLE COLORS:	Black	AM338 Covote	AML338
	DIACK	AM336 Coyote	AMILSSO
Model	AM338		AML338
Rated	338 LM/	NM and below	338 LM/NM and below
Length	9.9" (252	2 mm)	10.3" (262 mm)
Diameter	1.8" (46 mm)		1.9" (48 mm)
Weight	1.3 lbs (0	.6 kg)	1.6 lbs (0.7 kg)
Sound Reduction	< 140 db		< 140 db
Mount / Thread Pitch	7070007077	AM338 Muzzle apter: 3/4 x 24	Barrett® AM338 Muzzle Brake Adapter: 3/4 x 24
Materials	Grade 5 Titanium	n Core	Grade 5 Titanium Core with 4140 Lock Ring



The Barrett QDL suppressor is a cutting-edge firearm accessory that excels in noise reduction without compromising performance. Its modular design seamlessly integrates with the M107A1®, Model 99™*, and MRADELR™*, offering versatility and ease of attachment. Beyond minimizing noise signatures, the QDL suppressor also reduces recoil, providing a comfortable and controlled shooting experience. Backed by Barrett's commitment to quality, this suppressor stands as a testament to innovative firearm technology.







SPECIFICATIONS

VAILABLE COLORS:	
Black	Flat Dark Earth
Model	QDL (Quick Detach Large)
Caliber	50 BMG and 416 Barrett
Length	14.8" (376 mm)
Diameter	2.5" (64 mm)
Weight	4.9 lbs (2.2 kg)
Sound Reduction	23 dB
Mount / Thread Pitch	Barrett® QDL Muzzle Brake: 7/8 x 14
Materials	4130 Steel



416 BARRETT

50 BMG





416 Barrett
10 Rounds (Box) / 80 Rounds (Case)
4.64" (118 mm)
2,850 fps (36" Barrel)
Hornady A-Tip / 500 gr
0.967 (G1) / 0.492 (G7)



SPECIFICATIONS

Caliber	50 BMG
Cartridge Quantity	10 Rounds (Box) / 250 Rounds (Case)
Overall Length	5.450" (140 mm)
Muzzle Velocity	2,800 fps (29" Barrel)
Bullet / Weight	M-33 / 661 gr
Ballistic Coefficient	0.62 (G1)





BARRETT FIREARMS HEADQUARTERS

P.O. Box 1077 Murfreesboro, TN 37133 USA 615-896-2938

SALES & CUSTOMER SERVICE

mail@barrett.net

TRAINING

training@barrett.net

LAW ENFORCEMENT

le@barrett.net

MILITARY

military@barrett.net

DEALER DIRECT

dealer@barrett.net

MARKETING & MEDIA

media@barrett.net

INTERNATIONAL

international@barrett.net

© 2025 BARRETT / ALL RIGHTS RESERVED

barrett.net