



# THE LEADER IN

# LONG RANGE

Barrett products are used by civilian sport shooters, law enforcement agencies, the United States military, and more than 70 State Department approved countries across the world.



## **THE LINEUP**



















21 22

**MRAD® SMR** 





# **ENGINEERED FOR ACTION.**

What happens when you combine over 35 years of research and development with feedback from the most demanding military end users? You get the M107A1. While it may share the same iconic look and legendary reliability of legacy Barrett firearms, that is where the similarities end.

Utilizing state of the art design, manufacturing, and materials, every component of the rifle has been engineered to be lighter and stronger than its predecessors. In addition to a 4-pound weight reduction, the M107A1 is optimized for use with a sound suppressor, providing a much-needed signature reduction capability to the warfighter. Lighter, stronger, more precise, and more capable; the M107A1 has truly been engineered for action.



- 1 Recoil operated, semi-automatic
- 2 | Suppressor-ready bolt carrier and buffer assemblies
- 3 | Accepts Barrett QDL Suppressor
- 4 | 4 lbs. (1.8 kg) overall weight reduction compared to original M107
- 5 | Electroless Nickel plating on Bolt Assembly for reduced wear, maintenance, and added corrosion resistance
- 6 Lightweight aluminum upper receiver with integral 23" (584 mm) 27 MOA M1913 optics rail

- 7 | 20" (508 mm)\* or 29" (737 mm) barrel with chrome-lined chamber and bore
- 8 Anti-corrosive coatings
- 9 | 10-round steel magazine with cartridge witness indicators
- 10 | Flip up iron sights
- 11 | Modular rear hand grip mounted on M1913 rail accepts lightweight monopod
- 12 | Lightweight quick detach adjustable bipod
- 13 | Thermal cheek guard
- 14 | Recoil pad

#### **SPECIFICATIONS**

Caliber	50 BMG	50 BMG
Operation	Recoil Operated, Semi-Automatic	Recoil Operated, Semi-Automatic
Barrel Length	20" (508 mm)	29" (737 mm)
Rail Length / MOA	23" / 27 MOA (584 mm)	23" / 27 MOA (584 mm)
Overall Length	48" (1219 mm)	57" (1448 mm)
Twist Rate	1 : 15" (381 mm)	1 : 15" (381 mm)
Weight	27.4 lbs (12.4 kg)	28.7 lbs (13.0 kg)
Mag. Capacity	10	10

03 04

# THE POWERHOUSE RIFLE.

I FEFERIES FRANKLER

(COCCC)

The Model 82A1 is where the Barrett legacy began. Engineered as the first shoulder fired semi-automatic 50 BMG rifle, the Model 82A1 has been proven in combat in every environment from the snow covered mountains, to the desolate deserts, and everything in between. Its low felt recoil and reliable firepower delivers on target with every pull of the trigger. More than just a rifle, the Model 82A1 is an American icon.

1.000

MAR IN



- 1 | Recoil operated, semi-automatic
- 2 | High efficiency arrowhead 2-port brake for 50 BMG and cylindrical 3-port brake for 416 Barrett
- 3 Steel receivers come with a Mil-Spec phosphate coating for enhanced corrosion resistance
- 4 | 23" (584 mm) 27 MOA M1913 optics rail with carrying handle
- 5 | 20" 508 mm) or 29" (737 mm) barrel with chrome-lined chamber and bore
- 6 | 10-round steel magazine
- 7 | Flip up iron sights

- 8 | Rear hand grip accepts adjustable monopod
- 9 | Quick detach adjustable bipod
- 10 | Recoil pad
- 11 | Accepts side accessory rails
- 12 | Front and rear sling loops

Caliber	50 BMG	50 BMG	416 Barrett
Operation	Recoil Operated, Semi-Automatic	Recoil Operated, Semi-Automatic	Recoil Operated, Semi-Automatic
Barrel Length	20" (508 mm)	29" (737 mm)	29" (737 mm)
Rail Length / MOA	23" / 27 MOA (584 mm)	23" / 27 MOA (584 mm)	23" / 27 MOA (584 mm)
Overall Length	48" (1219 mm)	57" (1448 mm)	57" (1448 mm)
Twist Rate	1 : 15" (381 mm)	1 : 15" (381 mm)	1 : 12" (305 mm)
Weight	31.5 lbs (14.3 kg)	32.7 lbs (14.8 kg)	32.7 lbs (14.8 kg)
Mag. Capacity	10	10	10

20

# FULLY LOADED. The bolt-action Model 95 represents the ideal balance of size and performance.

The bolt-action Model 95 represents the ideal balance of size and performance. Its innovative bullpup design minimizes overall length without sacrificing ballistic performance or precision of the proven 50 BMG cartridge. Fed from a 5-round detachable box magazine, the combat-proven Model 95 is the pinnacle of simplicity for end users who demand precision, reliability, and power on the range or in the fight.



- 1 | Compact, lightweight bullpup design
- 2 Simplistic bolt carrier assembly with quick release lever
- 3 | Ergonomic bolt handle design
- 4 Mil-Spec phosphate coated for enhanced corrosion resistance
- 5 | 11.75" (299 mm) 27 MOA M1913 optics rail
- 6 | Chrome-chambered 29" (736 mm) steel fluted barrel
- 7 | 3-port high efficiency muzzle brake
- 8 | 5-round steel magazine
- 9 | Accepts rear adjustable monopod

- 10 | Recoil pad
- 11 | Quick Detach Adjustable Bipod

Caliber	50 BMG
Operation	Bolt Action Repeater
Barrel Length	29" (737 mm)
Rail Length / MOA	11.75" / 27 MOA (299 mm)
Overall Length	45" (1143 mm)
Twist Rate	1 : 15" (381 mm)
Weight	23.5 lbs (10.7 kg)
Mag. Capacity	5

13 | 14

### RUGGED. RELIABLE. UNCOMPLICATED.

The Model 99 is designed for one thing only: to get the job done. With its brilliantly simple design, hard-core construction, and surprisingly few moving parts, it offers match-winning precision time and time again.






- 1 One piece aluminum extrusion receiver
- 2 | Easy feed, single shot
- 3 | Interrupted, buttress-threaded bolt for superior lock up
- 4 | Black Mil-Spec Hardcoat anodized base with Cerakote finish
- 5 | 13.75" (349 mm) 27 MOA attached M1913 optics rail
- 6 Match grade 29" (736 mm) fluted or 32" (813 mm) heavy barrel
- 7 Available in 50 BMG or 416 Barrett
- 8 | 3-port high efficiency muzzle brake

- 9 | Quick-release assembly pins
- 10 | Rear hand grip accepts adjustable monopod
- 11 | Recoil pad
- 12 | Quick Detach Adjustable Bipod

Caliber	50 BMG	50 BMG	416 Barrett
Operation	Single Shot Bolt Action	Single Shot Bolt Action	Single Shot Bolt Action
Barrel Length	29" Fluted (737 mm)	32" Heavy (813 mm)	32" Heavy (813 mm)
Rail Length / MOA	13.75" / 27 MOA (349 mm)	13.75" / 27 MOA (349 mm)	13.75" / 27 MOA (349 mm)
Overall Length	47" (1194 mm)	50" (1270 mm)	50" (1270 mm)
Twist Rate	1 : 15" (381 mm)	1 : 15" (381 mm)	1 : 12" (305 mm)
Weight	23 lbs (10.4 kg)	25 lbs (11.3 kg)	25 lbs (11.3 kg)
Shot Capacity	1	1	1

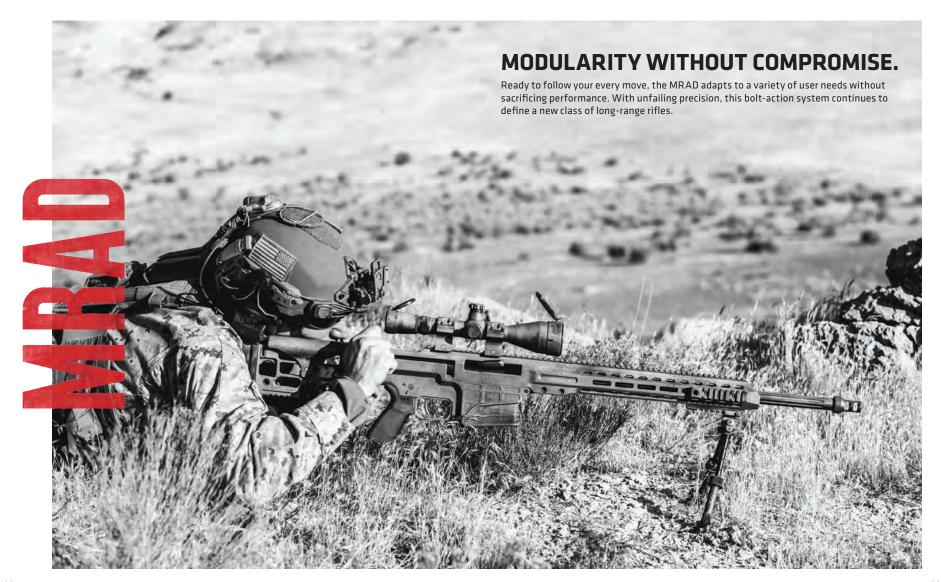

Flat Dark Earth



# **MRAD**<sup>®</sup>

#### **FEATURES**

- 1 Length of pull adjustable by push button
- 2 Polymer cheek piece is height adjustable from either side
- 3 | Lightweight folding stock provides compact mobility
- 4 | Polymer bolt guide acts as dust cover and provides smooth bolt cycling
- 5 10 MIL rail
- 6 | Mil-Spec Hardcoat anodized available in Cerakote<sup>™</sup> Black, Tungsten Grey, and Flat Dark Earth
- 7 | M-LOK<sup>®</sup> compatible upper receiver
- 8 | Match grade, fluted barrels
- 9 High efficiency, suppressor capable muzzle brake
- 10 User changeable calibers
- 11 | Relief cut magazine well for quick reloads

- 12 | 10-round, drop free, polymer magazine
- 13 Ambidextrous magazine release is accessible while maintaining firing grip
- 14 | Oversized trigger guard for operation with gloved hands
- 15 | Fully adjustable 2-stage trigger module can be removed without tools
- 16 | Accepts most standard M4/M16 pistol grips
- 17 | Thumb-operated safety configurable for right / left-handed operation
- 18 | Recoil pad with push button height adjustment
- 19 | 5 Shot, Sub-MOA Performance
- 20 | 2-5 slot M-LOK<sup>®</sup> rails 1-9 slot M-LOK<sup>®</sup> rails 1 M-LOK sling<sup>®</sup> mount

#### SPECIFICATIONS

Caliber	338 LM	338 NM	300 NM	300 PRC	300 WM	308 Win	6.5 Creed
Operation	Bolt Action						
	Repeater						
Barrel	26"	26"	26"	26"	26"	17" / 24"	24"
Length	(660 mm)	(432/610mm)	(610 mm)				
Rail Length Mil	21.75" 10 Mil (553 mm)						
Overall	49.4"	49.4"	49.4"	49.4"	49.4"	40.4" / 47.4"	47.4"
Length	(1255 mm)	(1026/1204mm)	(1204 mm)				
Twist	1:9.4"	1:9.4"	1 : 8"	1 : 8"	1 : 8"	1 : 8"	1 : 8"
Rate	(240 mm)	(240 mm)	(200 mm)				
Weight	14.5 lbs	11.9 / 13.3 lbs	13.3 lbs				
	(6.6 kg)	(5.4 / 6.0 kg)	(6.0 kg)				
Mag. Capacity	10	10	10	10	10	10	10

Tungsten Grey

Black



# **MRAD® SMR**

#### AVAILABLE COLORS



#### **FEATURES**

- 1 Polymer cheek piece is height adjustable from either side
- 2 | Fixed Stock (Additional Length of Pull available with Spacer Kit)
- 3 Polymer bolt guide acts as dust cover and provides smooth bolt cycling
- 4 | 10 MIL rail
- 5 | Mil-Spec Hardcoat anodized available in Cerakote<sup>™</sup> Black, Tungsten Grey, and Flat Dark Earth
- 6 | M-LOK<sup>®</sup> compatible upper receiver
- 7 | Match grade, fluted barrels
- 8 | High efficiency, suppressor capable muzzle brake
- 9 | 7 dedicated calibers
- 10 | Relief cut magazine well for quick reloads
- 11 | 10-round, drop free, polymer magazine

- 12 Ambidextrous magazine release is accessible while maintaining firing grip
- 13 | Oversized trigger guard for operation with gloved hands
- 14 | Fully adjustable 2-stage trigger module can be removed without tools
- 15 | Accepts most standard M4/M16 pistol grips
- 16 | Thumb-operated safety configurable for right / left-handed operation
- 17 | Recoil pad
- 18 | 5 Shot, Sub-MOA Performance
- 19 | 1-7 slot M-LOK<sup>®</sup> rail

Caliber	338 LM	338 NM	300 NM	300 PRC	300 WM	308 Win	6.5 Creed
Operation	Bolt Action						
	Repeater						
Barrel	26"	26"	26"	26"	26"	17" / 24"	24"
Length	(660 mm)	(432/610mm)	(610 mm)				
Rail Length Mil	21.75" 10 Mil (553 mm)						
Overall	48.5"	48.5"	48.5"	48.5"	48.5"	39.5"/46.5"	46.5"
Length	(1232 mm)	(1003/1181mm)	(1181mm)				
Twist	1 : 9.4"	1 : 9.4"	1 : 8"	1 : 8"	1 : 8"	1 : 8"	1 : 8"
Rate	(240 mm)	(240 mm)	(200 mm)				
Weight	12.3 lbs	10.6 / 12.0 lbs	12.0 lbs				
	(5.6 kg)	(4.8 / 5.4 kg)	(5.4 kg)				
Mag. Capacity	10	10	10	10	10	10	10



- 1 Length of pull adjustable by push button
- 2 | Polymer cheek piece is height adjustable from either side
- 3 | Lightweight folding stock provides compact mobility
- 4 | Polymer bolt guide acts as dust cover and provides smooth bolt cycling
- 5 | 10 MIL rail
- 6 | Mil-spec Hard Anodized base with Cerakote Coyote final finish
- 7 | M-LOK<sup>®</sup> compatible upper receiver
- 8 | Match grade, fluted barrels
- 9 | High efficiency, suppressor capable muzzle brake
- 10 | 3 User changeable calibers
- 11 | Relief cut magazine well for quick reloads

- 12 | 10-round, drop free, polymer magazine
- 13 Ambidextrous magazine release is accessible while maintaining firing grip
- 14 | Oversized trigger guard for operation with gloved hands
- 15 | Factory set single-stage trigger with anti-tamper epoxy on the adjustment screws
- 16 Accepts most standard M4/M16 pistol grips
- 17 | Thumb-operated safety configurable for right / left-handed operation
- 18 | Recoil pad with push button height adjustment
- 19 | Bag rider rail cover
- 20 | AML 338 Suppressor sold separately
- 21 | 3-9 slot M-LOK rails 2 sling mounts

Caliber	338 NM	300 NM	7.62 x 51 NATO
Operation	Bolt Action Repeater	Bolt Action Repeater	Bolt Action Repeater
Barrel Length	27" (686 mm)	26" (660 mm)	20" (508 mm)
Rail Length / Mil	21.75" / 10 Mil (553 mm)	21.75" / 10 Mil (553 mm)	21.75" / 10 Mil (553 mm)
Overall Length	49.4" (1255 mm)	48.4" (1229 mm)	42.4" (1077 mm)
Twist Rate	1:9.4" (240 mm)	1:8" (200 mm)	1: 8" (200 mm)
Weight	15.2 lbs (7.0 kg)	15.2 lbs (7.0 kg)	13.9 lbs (6.3 kg)
Mag. Capacity	10	10	10

## ELIMINATE ALL DOUBT.

Compact, precise and completely trustworthy, the REC7 is designed specifically for situations in which there's no room for error. Styled in the familiar AR configuration, it's a serious rifle you can trust with anything–including your life.



# **REC7**<sup>®</sup>

#### AVAILABLE COLORS

Black Tungsten Grey

Flat Dark Earth

#### **FEATURES**

- 1 | Piston operated, semi-automatic
- 2 | One piece piston
- 3 | Two-position gas plug
- 4 | Integrated strike face, anti-tilt bolt carrier
- 5 | Bolt carrier group is plated in a super-tough DLC coating
- 6 | Barrel with chrome-lined chamber and bore (Carbine/Flyweight) Match grade SS barrel (DMR)
- 7 | M-LOK<sup>®</sup> handguard
- 8 | Barrett 3-prong flash hider (Carbine/ Flyweight) Barrett 2 port muzzle brake (DMR)
- 9 Beveled magazine well for rapid changes

- 10 | ALG Defense QMS Trigger (Carbine/Flyweight) Trigger Tech Adaptable 2.5-5.0 lbs adj. (DMR)
- 11 Enhanced trigger guard allows access with gloves
- 12 | Ambidextrous safety (45° or 90° throw)
- 13 | Radian charging handle
- 14 | Magpul backup sights
- 15 | Magpul Buttstock with adjustable length of pull
- 16 | Magpul MOE pistol grip
- 17 | Magpul Magazine
- 18 | 5 Shot Sub MOA precision barrel (DMR)
- 19 | Comes with Barrett branded soft case

	CARBINE	FLYWEIGHT	DMR	
Caliber	5.56 x 45 NATO	5.56 x 45 NATO	5.56 x 45 NATO	
Operation	Gas Piston; Semi-Automatic	Gas Piston; Semi-Automatic	Gas Piston; Semi-Automatic	
Barrel Length	16" (406 mm)	16" (406 mm)	18" (457 mm)	
Overall Length	33.3" (846 mm)	33.3" (846 mm)	35.3" (897 mm)	
Twist Rate	1 : 7" (178 mm)	1 : 7" (178 mm)	1 : 7.7" (196 mm)	
Weight	7.2 lbs (3.3 kg)	6.1 lbs (2.8 kg)	7.9 lbs (3.6 kg)	
Mag. Capacity	30	20	20	
Barrel	Chrome lined	Chrome lined	Match grade Stainless Steel	
Buttstock	Magpul MOE SL	Magpul SL-K	Magpul MOE SL-S	
Trigger	ALG Defense QMS	ALG Defense QMS	Trigger Tech Adaptable	



1 Direct Impingement, semi-automatic

10 | Radian charging handle

13 | Magpul MOE pistol grip

14 | Magpul Magazine

12 | Magpul Buttstock with adjustable

15 | 5 Shot Sub MOA precision barrel (DMR)

16 | Comes with Barrett branded soft case

length of pull (Carbine/DMR)

11 MBUS<sup>®</sup> sights

- 2 | Bolt Carrier has Diamond-Like Carbon Coating (DLC) for high corrosion resistance and low coefficient of friction
- 3 Stainless Steel barrel (Carbine/Pistol) Match grade Stainless Steel barrel (DMR)
- 4 M-LOK® handguard
- 5 | Barrett 3-prong flash hider (Carbine/Pistol) Barrett 2 port muzzle brake (DMR)
- 6 | Beveled magazine well for rapid changes
- 7 | ALG Defense QMS Trigger (Carbine, Pistol) Trigger Tech Adaptable 2.5-5.0 lbs adj.(DMR)
- 8 Enhanced trigger guard allows access with gloves
- 9 Ambidextrous safety (45° or 90° throw)

	CARBINE	PISTOL	DMR
Caliber	5.56 x 45 NATO	5.56 x 45 NATO	5.56 x 45 NATO
Operation	Direct Impingement; Semi-Automatic	Direct Impingement; Semi-Automatic	Direct Impingement; Semi-Automatic
Barrel Length	16" (406 mm)	10.25" (260 mm)	18" (457 mm)
Overall Length	33.3" (846 mm)	26.3" (668 mm)	35.3" (897 mm)
Twist Rate	1 : 7" (178 mm)	1 : 7" (178 mm)	1 : 7.7" (196 mm)
Weight	6.2 lbs (2.8 kg)	5.5 lbs (2.5 kg)	7.9 lbs (3.6 kg)
Mag. Capacity	30	20	20
Barrel	Stainless Steel	Stainless Steel	Match grade Stainless Steel
Buttstock	Magpul MOE SL	Gearhead Works Tailhook Mod 1	Magpul MOE SL-S
Trigger	ALG Defense QMS	ALG Defense QMS	Trigger Tech Adaptable





# **REC10<sup>®</sup>**

#### AVAILABLE COLORS

Black Tungsten Grey

Flat Dark Earth

33 34

#### **FEATURES**

- 1 | Direct impingement, semi-auto
- 2 | Precision machined billet upper and lower receivers
- 3 | Bolt Carrier has Diamond-Like Carbon Coating (DLC) for high corrosion resistance and low coefficient of friction
- 4 | Intermediate length gas system
- 5 | M-LOK<sup>®</sup> handguard
- 6 | Barrett flash hider
- 7 | Beveled magazine well for rapid changes
- 8 | ALG Defense QMS trigger
- 9 Enhanced trigger guard allows access with gloves

- 10 | Ambidextrous safety (45° or 90° throw)
- 11 | Ambidextrous bolt release
- 12 | Ambidextrous mag catch
- 13 | Radian charging handle
- 14 | MBUS® sights
- 15 | Magpul with adjustable length of pull
- 16 | Magpul MOE pistol grip
- 17 | Magpul Magazine
- 18 | Comes with Barrett branded soft case
- 19 | Flow-through suppressor capable

Caliber	308 Win
Operation	Direct Impingement; Semi-Automatic
Barrel Length	16" (406 mm)
Overall Length	34.5" (876 mm)
Twist Rate	1 : 10" (254 mm)
Weight	8.3 lbs (3.8 kg)
Mag. Capacity	20
Barrel	Chrome lined
Buttstock	Magpul MOE SL
Trigger	ALG Defense QMS





# **AM & AML SUPPRESSORS**

\*Not Select Fire Rated

# **QDL SUPPRESSORS**

#### **SPECIFICATIONS**

Model	AM 30	AM 338	AML 338
Caliber	30 and less	338 and less	338 and less
Length	8.3" (211 mm)	9.9" (252 mm)	10.3" (262 mm)
Diameter	1.5" (38 mm)	1.8" (46 mm)	1.9" (48 mm)
Weight	.775 lbs (0.4 kg)	1.3 lbs (0.6 kg)	1.6 lbs (0.7 kg)
Sound Reduction	-25-30 dB	-23-28 dB	-23-28 dB
Mount & Thread Pitch	Barrett® Muzzle Brake Adaptor: 5/8 x 24	Barrett® Muzzle Brake Adaptor: 3/4 x 24	Barrett® Muzzle Brake Adaptor: 3/4 x 24
Materials	Titanium Alloy	Titanium Alloy	Titanium Alloy w/ 4140 Lock Ring

Model	Barrett QDL Suppressor
Caliber	50 BMG
Length	14.8" (376 mm)
Diameter	2.5" (64 mm)
Weight	4.9 lbs (2.2 kg)
Sound Reduction	23 dB
Mount	Quick Detach 1/4 Turn Lock Ring
Materials	4130 Steel



# **B**ARRETT.

#### **BARRETT FIREARMS HEADQUARTERS**

P.O. Box 1077 Murfreesboro, TN 37133 USA 615-896-2938 barrett.net

CUSTOMER SERVICE / TECH SUPPORT mail@barrett.net

TRAINING training@barrett.net

LAW ENFORCEMENT le@barrett.net

MILITARY military@barrett.net

DEALER DIRECT dealer@barrett.net

MARKETING & MEDIA media@barrett.net

INTERNATIONAL international@barrett.net

© 2021 BARRETT / ALL RIGHTS RESERVED

